



Ethnicraft



DECLARATION OF COMPLIANCE
N701 SOFA - STANDARD FABRIC

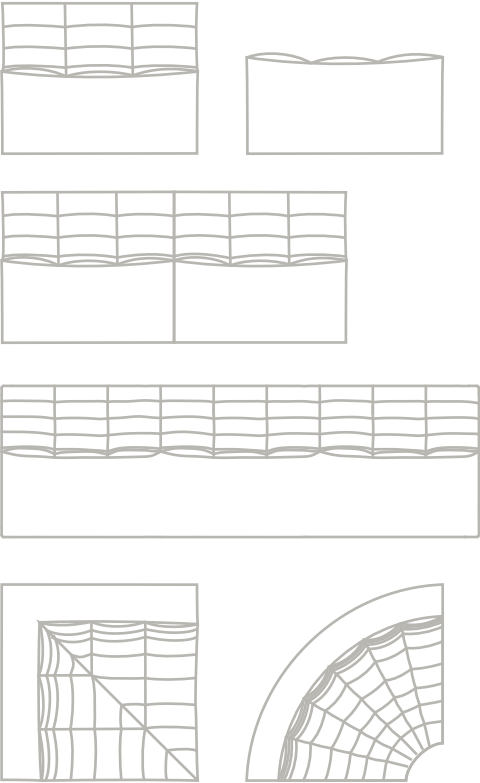

<p>ITEM N701 SOFA - STANDARD FABRIC BEIGE, DARK GREY, BLUE</p>	<p>Ethnicraft declares that this product is compliant with the following regulations and legislation, and has obtained the certificates accordingly.</p>												
	<p>FABRIC composition & specifications:</p> <table border="0"> <tr> <td>Beige, dark grey, blue</td> <td>: PES 84%, AC 16%</td> </tr> <tr> <td>Martindale rubs</td> <td>: 100,000</td> </tr> <tr> <td>Pilling (2000 cycles)</td> <td>: 3/4</td> </tr> <tr> <td>Lightfastness (UNI EN ISO 105-B02)</td> <td>: 5/6</td> </tr> <tr> <td>Col. fastness to rubbing (UNI EN ISO 105-X12)</td> <td>: Dry 4/5 - Wet 4</td> </tr> <tr> <td>Weight (g/Lm)</td> <td>: 900</td> </tr> </table> <p>FR Standards</p> <p>California TB 117-2013 (flammability)</p> <p>FOAM certification:</p> <p>California TB 117-2013 (flammability)</p> <p>PLYWOOD certification:</p> <p>TSCA VI (harmful substances)</p>	Beige, dark grey, blue	: PES 84%, AC 16%	Martindale rubs	: 100,000	Pilling (2000 cycles)	: 3/4	Lightfastness (UNI EN ISO 105-B02)	: 5/6	Col. fastness to rubbing (UNI EN ISO 105-X12)	: Dry 4/5 - Wet 4	Weight (g/Lm)	: 900
Beige, dark grey, blue	: PES 84%, AC 16%												
Martindale rubs	: 100,000												
Pilling (2000 cycles)	: 3/4												
Lightfastness (UNI EN ISO 105-B02)	: 5/6												
Col. fastness to rubbing (UNI EN ISO 105-X12)	: Dry 4/5 - Wet 4												
Weight (g/Lm)	: 900												
<p>Ethnicraft Belgium, Heaquarters Scheldeweg 5 - 2850 Boom</p> <p>info@ethnicraft.com ethnicraft.com</p>													

